FLOODED DEEP CYCLE BATTERY

32 CS 15PR





Series	FLA SERIES 5000	Warranty	5 Years
Volts	32	Design	SPEC
Cells	16	Plates/Cell	15
Terminal Type		Paddle RR	

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1219
Marine Crank Amps (MCA) 32°F / 0°C	1524
Reserve Capacity (RC @ 25A)	1193 Minutes
Reserve Capacity (RC @ 75A)	398 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**641 AH**	**6.41 A**
@ 72 Hour Rate	**606 AH**	**8.42 A**
@ 50 Hour Rate	**574 AH**	**11.48 A**
@ 20 Hour Rate	**497 AH**	**24.86 A**
@ 15 Hour Rate	**462 AH**	**30.82 A**
@ 10 Hour Rate	**442 AH**	**44.24 A**
@ 8 Hour Rate	**428 AH**	**53.44 A**
@ 5 Hour Rate	**398 AH**	**79.54 A**
@ 1 Hour Rate	**224 AH**	**223.70 A**

Specifications


Weight	471.50 kg	1040 lbs
Length	685 mm	26.95"
Width	686 mm	27"
Height Incl. Term.	521 mm	20.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	None	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps

Cycle Life vs. Depth of Discharge

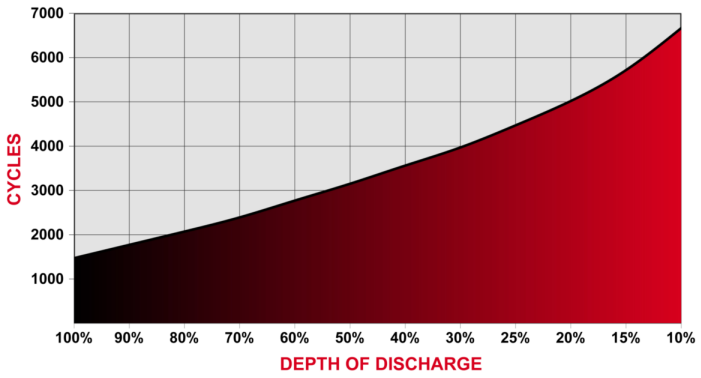

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

0122624

Rev.#4 | August 2024