FLOODED DEEP CYCLE BATTERY

6 FS L16-HC-N





Series	FLA FS SERIES	Warranty	1 Year
Volts	6	Design	903
Cells	3	Plates/Cell	17
Terminal Type		DT	
Included Hardware		Stainless Steel K-Lock Nut	
Size & Thread		5/16"-18	

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	828 Minutes
Reserve Capacity (RC @ 75A)	218 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**489 AH**	**4.89 A**
@ 72 Hour Rate	**476 AH**	**6.61 A**
@ 50 Hour Rate	**459 AH**	**9.18 A**
@ 20 Hour Rate	**425 AH**	**21.25 A**
@ 15 Hour Rate	**400 AH**	**26.63 A**
@ 10 Hour Rate	**383 AH**	**38.25 A**
@ 8 Hour Rate	**366 AH**	**45.69 A**
@ 5 Hour Rate	**340 AH**	**68.0 A**
@ 1 Hour Rate	**200 AH**	**199.75 A**

Specifications

Weight	55.5 kg	122.5 lbs
Length	300 mm	11.85"
Width	181 mm	7.13"
Height Incl. Term.	425.5 mm	16.75"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	None. Optional L16 Battery Sling	

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

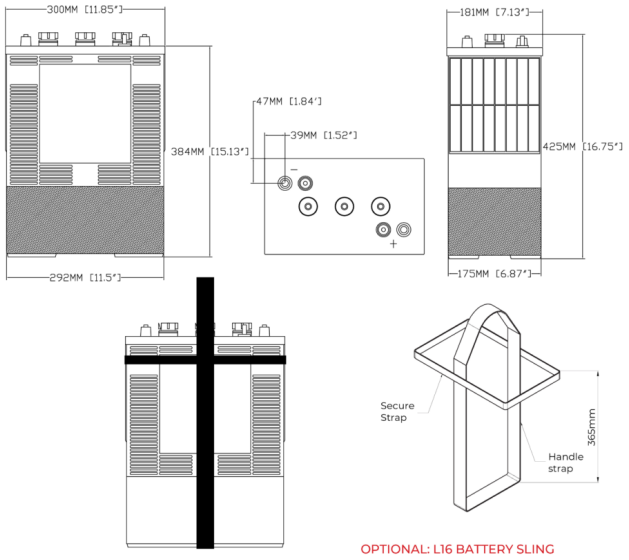

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

0122624

Rev.#3 | June 2026