AGM VRLA DEEP CYCLE BATTERY

S12-160AGM-RE







Series	VRLA AGM-S	Warranty	See Warranty Terms
Volts	12	Design	SPEC
Cells	6		
Terminal Type	F12(M8) and TP08 Adapter [+21mm]		
Included Hardware	M8 stainless bolts & washers & TP08 adapter		
Size & Thread	M8		

Charge | Discharge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	30 A
Maximum Charge Current	40 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	3.6 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	795
Marine Crank Amps (MCA) 32°F / 0°C	950
Reserve Capacity (RC @ 25A)	260 Minutes
Reserve Capacity (RC @ 75A)	75 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**160 AH**	**1.6 A**
@ 20 Hour Rate	**145 AH**	**7.25 A**
@ 10 Hour Rate	**126 AH**	**12.6 A**
@ 5 Hour Rate	**115 AH**	**23 A**

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	76.9	44.3	31.8	22.7	15.3	12.6

Specifications


Weight	41.5 kg	91.5 lbs
Length	341 mm	13.43"
Width	172 mm	6.77"
Height Incl. Term.	309 mm	12.17"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	Nylon Strap

- Plastics are UL94 HB (UL94 V0 available)
- Valve regulated design with integral flame arrestor
- Non-hazardous, Non-spillable


Cycle Life vs. Depth of Discharge

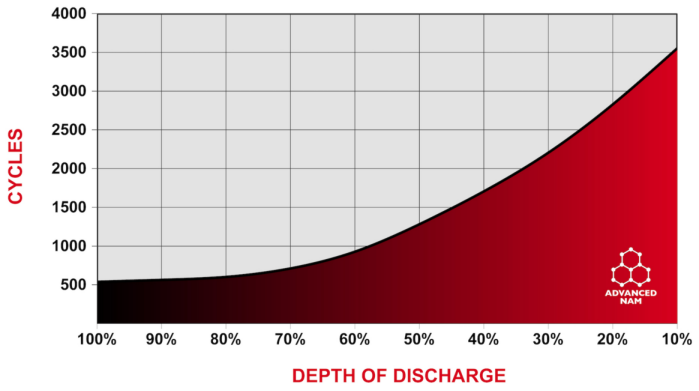

Capacity vs. Temperature

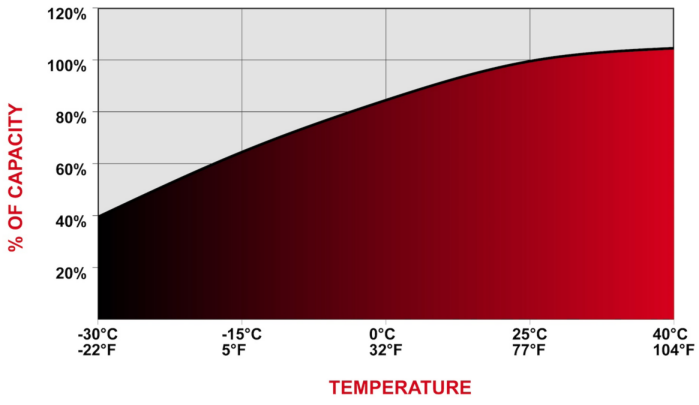

Detailed Illustration

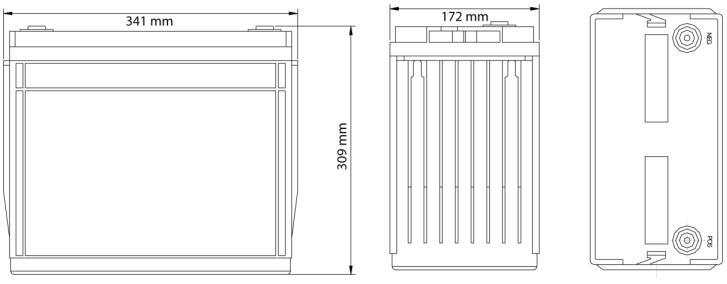

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

Rev.#9 | October 2026