
FLOODED DEEP CYCLE BATTERY

S12 24





Series	FLA SERIES 4000	Warranty	3 Years
Volts	12	Design	Grp 24
Cells	6		
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	10 A
Maximum Charge Current	20 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	550
Marine Crank Amps (MCA) 32°F / 0°C	690
Reserve Capacity (RC @ 25A)	150 Minutes
Reserve Capacity (RC @ 75A)	43 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**106 AH**	**1.06 A**
@ 20 Hour Rate	**85 AH**	**4.25 A**
@ 15 Hour Rate	**80 AH**	**5.33 A**
@ 10 Hour Rate	**72 AH**	**7.23 A**
@ 8 Hour Rate	**71 AH**	**8.82 A**
@ 5 Hour Rate	**69 AH**	**13.8 A**
@ 1 Hour Rate	**31 AH**	**30.6 A**

Specifications


Weight	21.5 kg	47.5 lbs
Length	259 mm	10.19"
Width	173 mm	6.75"
Height	204 mm	8.03"
Height Incl. Term.	223 mm	878"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Container	ABS
Cover	ABS
Handles	Integrated Top Mount

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


Cycle Life vs. Depth of Discharge

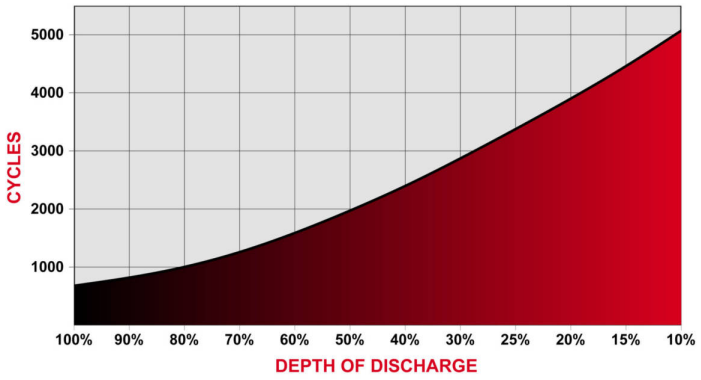

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

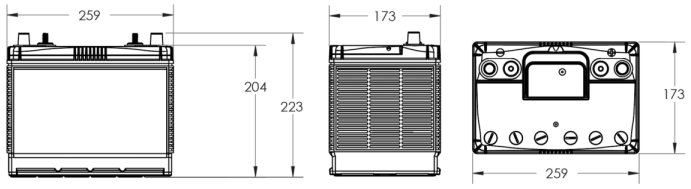

BATTERY COUNCIL INTERNATIONAL

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

intertek 0122624

Rev.#3 | November 2026