Rolls

FLOODED DEEP CYCLE BATTERY

S6 GC2-HC



Series	FLA SERIES 4000	Warranty	3 Years
Volts	6	Design	GC2
Cells	3	Plates/Cell	17
Terminal Type		DT	
Included Hardware		Stainless Steel K-Lock Nut	
Size & Thread		5/16"-18	

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	30 A
Maximum Charge Current	45 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	625
Marine Crank Amps (MCA) 32°F / 0°C	781
Reserve Capacity (RC @ 25A)	466 Minutes
Reserve Capacity (RC @ 75A)	117 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**308 AH**	**3.08 A**
@ 72 Hour Rate	**304 AH**	**4.22 A**
@ 50 Hour Rate	**287 AH**	**5.74 A**
@ 20 Hour Rate	**241 AH**	**12.05 A**
@ 15 Hour Rate	**229 AH**	**15.26 A**
@ 10 Hour Rate	**212 AH**	**21.21 A**
@ 8 Hour Rate	**207 AH**	**25.91 A**
@ 5 Hour Rate	**190 AH**	**38.08 A**
@ 1 Hour Rate	**96 AH**	**96.4 A**

Specifications


Weight	31.5 kg	69.5 lbs
Length	259 mm	10.19"
Width	181 mm	7.13"
Height Incl. Term.	279 mm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


Cycle Life vs. Depth of Discharge

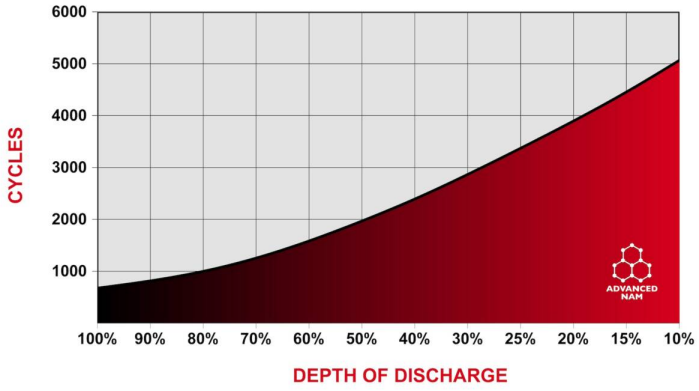

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

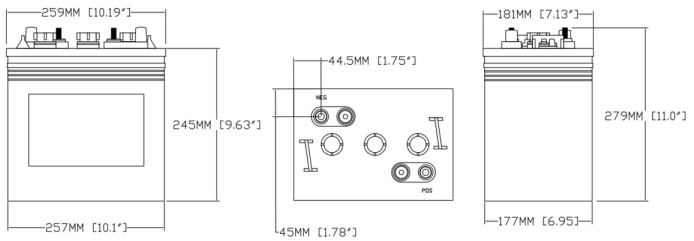

BCI BATTERY COUNCIL INTERNATIONAL

CE

ISO 9001:2015 CERTIFICATION intertek 0122624

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

Rev.#2 | August 2024