
FLOODED DEEP CYCLE BATTERY

S6 L16-HC





Series	FLA SERIES 4000	Warranty	3 Years
Volts	6	Design	L16
Cells	3	Plates/Cell	17
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		
Cables	Optional: 19" 4/0 interconnect cable		

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	50 A
Maximum Charge Current	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	861 Minutes
Reserve Capacity (RC @ 75A)	226 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	**512 AH**	**5.12 A**
@ 72 Hour Rate	**498 AH**	**6.92 A**
@ 50 Hour Rate	**481 AH**	**9.61 A**
@ 20 Hour Rate	**445 AH**	**22.25 A**
@ 15 Hour Rate	**418 AH**	**27.89 A**
@ 10 Hour Rate	**401 AH**	**40.05 A**
@ 8 Hour Rate	**383 AH**	**47.84 A**
@ 5 Hour Rate	**356 AH**	**71.20 A**
@ 1 Hour Rate	**209 AH**	**209.15 A**

Specifications


Weight	55.5 kg	122.5 lbs
Length	318 mm	12.5"
Width	181 mm	7.13"
Height Incl. Term.	425.5 mm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


Cycle Life vs. Depth of Discharge

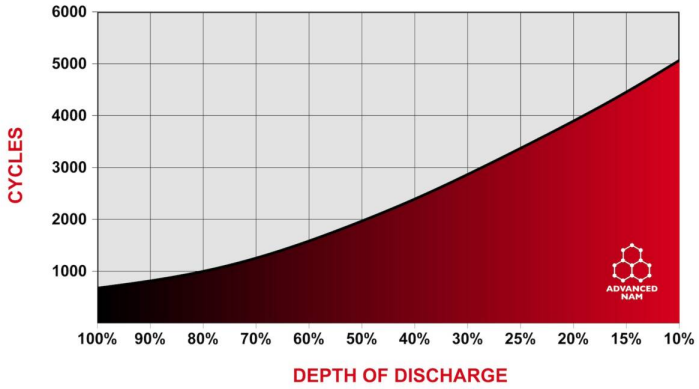

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

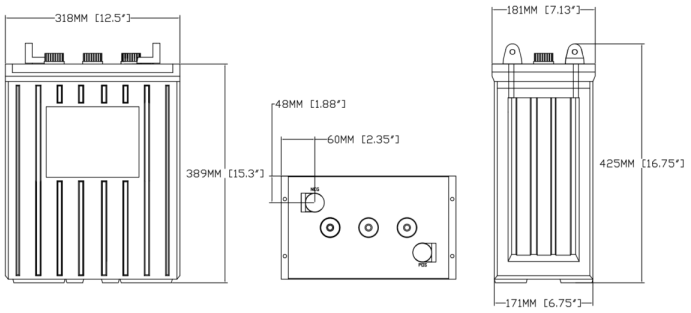

BCI BATTERY COUNCIL INTERNATIONAL

CE

ISO 9001:2015 CERTIFICATION intertek 0122624

Designed in compliance with applicable BCI, DIN, BS & IEC standards.
Tested in compliance to BCI & IEC standards.

Rev.#3 | August 2024